



US 5/25502

10/585918 US03/25502



Rec'd PCT/PTO

INVESTOR IN PEOPLE  
27 SEP 2005

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## CERTIFIED COPY OF PRIORITY DOCUMENT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 30 May 2003

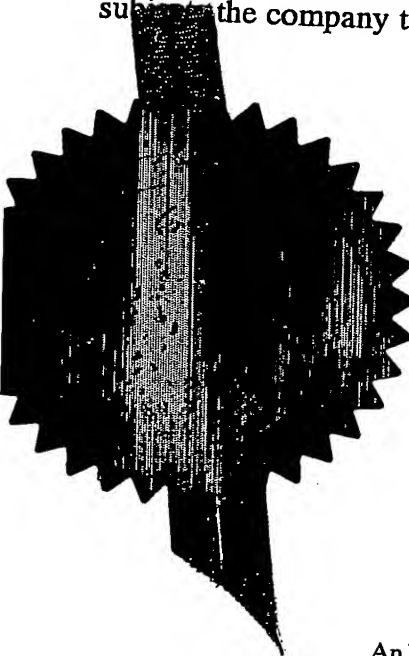

## Patents Form 1/77

Patents Act 1977  
(Rule 16)16SEP02 E748302-1 002956  
P01/7700 0.00-0221343.7

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## 1. Your reference

57768 GB 002

## 2. Patent application number

(The Patent Office will fill in this part)

0221343.7

16 SEP 2002

## 3. Full name, address and postcode of the or of each applicant (underline all surnames)

3M Innovative Properties Company  
3M Center / 220 - 11W - 01  
I-94 and McKnight Road  
St. Paul  
MN 55144-1000, USA

Patents ADP number (if you know it)

8465098001

If the applicant is a corporate body, give the country/state of its incorporation

USA / Delaware

## 4. Title of the invention

AEROSOL DISPENSERS AND  
ADAPTORS THEREFOR

## 5. Name of your agent (if you have one)

Lorraine Aleandri-Hachgenei

"Address for service" in the United Kingdom  
to which all correspondence should be sent  
(including the postcode)OIPC Neuss  
c/o Department of Legal Affairs  
3M United Kingdom PLC  
3M House  
P. O. Box 1, Market Place  
RG12 1JU Bracknell, Berkshire

Patents ADP number (if you know it)

8357741001

## 6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)Date of filing  
(day / month / year)

## 7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

## 8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	0
Description	12
Claim(s)	4
Abstract	1
Drawing(s)	6 only

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	1 ✓
Request for preliminary examination and search (Patents Form 9/77)	0
Request for substantive examination (Patents Form 10/77)	0
Any other documents (please specify)	0

11.

I/We request the grant of a patent on the basis of this application.

*Lorraine Aleandri-Hachgenel*  
Signature

Date

Lorraine Aleandri-Hachgenel

Sept. 16, 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Paula Roan  
Dept. of Legal Affairs  
0 13 44 / 85 86 23

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## Aerosol Dispensers and Adaptors therefor

### Field of the Invention

This invention relates to adaptors for use in dispensers as well as to dispensers for  
5 dispensing doses of pressurized aerosol formulation, in particular for dispensing  
metered doses of medicament for administration to the respiratory system of a patient.

### Background of the Invention

The use of pharmaceutical aerosols and pressurized medicinal dispensers for inhalation  
10 administration of medicaments to a patient is commonplace and becoming increasingly  
even more important.

The medicament is generally formulated with one or more propellants (e.g.  
chlorofluorocarbons and more recently hydrogen-containing fluorocarbons, including  
15 hydrofluoroalkanes, such as propellant 134a ( $\text{CF}_3\text{CH}_2\text{F}$ ) and propellant 227  
( $\text{CF}_3\text{CHF}_2$ ), as well as any additional excipients or components, and then charged in  
a container or vial. The container is typically fitted by means of a ferrule with a  
dispensing valve, in particular a metered dose dispensing valve, comprising an elongate  
outlet member or valve stem movable between closed and dispensing positions, to  
20 provide a dispensing canister. The dispensing canister is typically used in conjunction  
with an adaptor, typically having a patient port, for example a mouthpiece or a port  
adapted for nasal use. In conventional dispensers, such as a conventional press-and-  
breathe inhaler, the adaptor typically comprises a support block having a socket adapted  
to receive the valve stem of the dispensing valve and an orifice having open  
25 communication with the socket and the patient port.

With conventional dispensing valves, the valve stem is typically biased to its closed  
position with the valve stem extending outwardly relative to the container (an "outer"  
closed position) and to actuate or fire the valve, the valve stem is depressed inwardly to  
30 the dispensing position (an "inner" dispensing position) allowing a dose to be dispensed.  
For example, with a conventional press-and-breathe device, the patient fires the device

by depressing the container towards the support block of the adaptor and thus depressing the valve stem inwardly, while inhaling.

Some dispensing valves, for example certain embodiments of shuttle-type metered dose  
5 dispensing valves disclosed in US 5,772,085, do not operate in the conventional push-  
to-fire manner. Instead the valve stem moves relative to the container from an inner  
closed or priming position to an outer dispensing position. In other words, the  
dispensing valve is actuated or fired upon movement of the valve stem outwardly  
relative to the container. The operation of such valves would typically require the user  
10 to depress the valve stem inwardly to the priming position and then release to allow  
firing during the release stroke upon the outward movement of the valve stem to the  
dispensing position.

#### Summary of the Invention

15 It has been recognized that the unfamiliar firing upon release (release-to-fire operation)  
may cause confusion for the patient. In particular, it has been appreciated that the patient  
often has undergone intensive training to learn how to coordinate inhaling while  
operating a conventional press-and-breathe type of inhaler (i.e. a push-to-fire dispenser),  
and thus may find it difficult, if not nearly impossible, to switch to using a dispenser  
20 based on a release-to-fire operation. This holds particularly true, because patients, such  
as asthma patients, often tend to be sensitive to and reluctant towards any change in the  
medicinal dispenser (or inhaler) they are using.

Surprisingly we have been able to provide adaptors as well as dispensers, which allow  
25 the patient to use release-to-fire-type valves in the conventional manner.

Accordingly in one aspect of the present invention there is provided an adaptor for use  
with a container equipped with a dispensing valve that comprises a valve stem movable  
between an inner closed or priming position and an outer dispensing position, for  
30 dispensing doses of pressurized aerosol formulation,  
the adaptor being adapted to receive the container and comprising an actuation  
mechanism, said actuation mechanism being arranged such that the user will operate the

mechanism by applying a depressive or squeezing force and the dose will be dispensed upon said depressive or squeezing force and said actuation mechanism being arranged such that upon release of the mechanism by the user, the valve stem of the dispensing valve will be moved automatically to its closed or priming position.

5

In another aspect of the present invention there is provided a dispenser for dispensing doses of pressurized aerosol formulation, said dispenser comprising:

a container containing pressurized aerosol formulation and equipped with a dispensing valve that comprises a valve stem movable between an inner closed or priming position

10 and an outer dispensing position, to dispense a dose; and

an adaptor adapted to receive the container and comprising an actuation mechanism, said actuation mechanism being arranged such that the user operates the mechanism by applying a depressive or squeezing force and the dose is dispensed upon said depressive or squeezing force and said actuation mechanism being arranged such that upon release

15 of the mechanism by the user, the valve stem of the dispensing valve is moved automatically to its closed or priming position.

The use of adaptors or dispensers in accordance with the invention is advantageous in that the patient can operate the dispenser in a similar manner to a conventional press-  
20 and-breathe type inhaler. While inhaling, the patient exerts a depressing force upon the actuation mechanism to allow a dose to dispense. After such firing, the patient simply releases the actuation mechanism. Because the actuation mechanism is arranged such that the valve stem of the dispensing valve is moved or returned automatically to its inner closed or priming position upon said release, the dispenser is advantageously  
25 ready for the next firing without any additional operation by the patient. Dispensers in accordance with the invention are also advantageous in that due to the automatic immediate resetting of the valve to its inner closed or priming position upon release by the patient, potentially sensitive portions of the interior of the dispensing valve are desirably sealed off from the outside environment, and thus protected from air and  
30 moisture ingress between individual firings of the dispenser.

In preferred embodiments, the actuation mechanism is arranged, such that upon said depressive or squeezing force the valve stem is pulled from its closed or priming position into its dispensing position. Such preferred embodiments are particularly advantageous for use with dispensing valves free of an internal spring bias for biasing  
5 the valve stem towards its outer dispensing position.

Suitable dispensing valves include in particular dispensing valves arranged to be of neutral bias (i.e. the valve stem being neither biased towards its closed/priming or dispensing position) as well as dispensing valves arranged, such that the valve stem will  
10 be biased outwardly towards its dispensing position by vapor pressure generated by pressurized aerosol formulation contained within the container of the dispenser.

In one embodiment, the actuation mechanism comprises a mounting block and an actuating member; said mounting block being adapted to retain the container and to  
15 prevent movement of the container relative to the adaptor and said actuating member being in contact with the valve stem and biased towards the container, such that the valve stem rests in its closed or priming position. Suitably the actuating member may be arranged, such that upon said depressive or squeezing force the actuating member  
20 moves away from the container against the bias allowing the valve stem to move into its dispensing position. Alternatively and more desirably, the actuating member may be coupled to the valve stem and arranged, such that upon said depressive or squeezing force the actuating member moves away from the container against the bias, thereby pulling the valve stem into its dispensing position.

25 In other embodiments, the actuation mechanism may comprise an anchoring block, which is adapted to retain the valve stem and to prevent movement of the valve stem relative to the adaptor. Here the container is desirably biased towards the valve stem, such that the valve stem rests in its closed or priming position, and the actuation mechanism desirably comprises an actuating member being arranged, such that upon  
30 said depressive or squeezing force, the actuating member moves the container against the bias away from the valve stem, thereby pulling the valve stem into its dispensing position relative to the container.

These adaptors and dispensers are particularly suitable for use with metered dose dispensing valves, more particularly shuttle-type metered dose dispensing valves. In preferred embodiments, the dispensing valve further comprises a chamber and an outlet passage, wherein the valve stem extends into the chamber and is movable relative to the chamber between the closed or priming position and the dispensing position; the valve stem having a configuration including an external surface and the chamber having an internal configuration including an internal surface, such that a movable metered volume of pressurized aerosol formulation is capable of being defined therebetween and such that during movement between the closed or priming position and the dispensing position the valve stem sequentially:

- (i) allows free flow of aerosol formulation into and out of the chamber,
- (ii) defines a closed metered volume for pressurized aerosol formulation between the external surface of the valve stem and internal surface of the chamber, and
- (iii) moves with the closed metered volume within the chamber without decreasing the volume of the closed metered volume until the metered volume communicates with the outlet passage thereby allowing dispensing of the metered volume of pressurized aerosol formulation.

Further embodiments of the invention are defined in the dependent claims.

The invention, its embodiments and further advantages will be described in the following with reference to the following drawings.

#### Brief Description of the Drawings

Figures 1a and b represent vertical cross sections through a valve comprising an valve stem movable from an inner closed or priming position to an outer dispensing position.

Figure 2 represents schematically a vertical cross section of a preferred embodiment of the dispenser in accordance with the invention.

Figures 3 represents schematically a vertical cross section of another preferred embodiment of the dispenser in accordance with the invention.



Figure 4 represents schematically a vertical cross section of an additional preferred embodiment of the dispenser in accordance with the invention.

- 5 Figure 5 represents schematically a vertical cross section of a further preferred embodiment of the dispenser in accordance with the invention.

Figure 6 represents schematically a vertical cross section of a yet further preferred embodiment of the dispenser in accordance with the invention.

10

#### Detailed Description

It is to be understood that the present invention covers all combinations of particular and preferred aspects of the invention described herein.

15

For a better understanding of the various aspects of the present invention, one exemplary dispensing valve, which is actuated or fired upon movement of the valve stem outwardly and particularly suitable for use in the present invention, will be initially described.

20

Figures 1a and b illustrate an exemplary shuttle-type metered dose dispensing valve. Referring to Fig. 1a and b, the valve typically comprises a body (2) having an annular seal or gasket (4) for engaging the neck of an aerosol container or vial (not shown) to facilitate a gas-tight seal. The body (2) may be secured to the aerosol container or vial by any suitable means e.g. a conventional outer casing or ferrule (5), which is crimped around the neck of the aerosol container. As can be best seen in Fig. 1b, the body (2) defines a chamber (6) having an outlet passage (10) for dispensing e.g. pressurized aerosol formulation. The valve stem (12) extends through the chamber (6) and is movable between a closed or priming position (as shown in Fig. 1a) and a dispensing position (as shown in Fig. 1b). The valve stem (12) is desirably fitted with an inner seal (16) and outer seal (18), which provide gas-tight seals between the valve stem and the inner wall of the chamber (6). The chamber (6), external dimensions of the valve stem

25

30

(12) and the positions of the seals (16 and 18) are arranged to define a pre-determined volume within the chamber (6) between the seals (16 and 18). This can be best understood by reference to Fig. 1b showing the valve in its dispensing position. As can be seen in Fig. 1a, in its closed or priming position the space between the seals (16 and 18) around the valve stem (12) extends into the reservoir containing aerosol formulation. As the valve stem (12) moves downwardly to its dispensing position, the seal (18) moves down the chamber allowing free access of the aerosol formulation in to the chamber (6). Further movement of the valve stem causes seal (16) to enter the chamber (6) thereby trapping a metered volume of aerosol formulation between the seals (16 and 18) and the interior wall of the chamber (6). When the valve stem reaches its dispensing position the seal (18) passes outlet passage (10) thereby allowing direct communication between the metered volume and the outlet passage (10) thereby allowing the metered volume of formulation to be dispensed. In the illustrated valve, the valve is arranged, in particular the cross-sectional area of the seals (16 and 18) is arranged, such that the valve stem will be biased outwardly towards its dispensing position by vapor pressure generated by pressurized aerosol formulation contained within the container of the dispenser. The alignment of the valve stem may be ensured by ribs (20) which do not obstruct the free flow of aerosol formulation (as depicted by the arrow in Figure 1a) around the valve stem (12) between the seals (16 and 18).

20

It is to be understood that Figures 1a and b show one exemplary dispensing valve, which is suitable for use in the present invention, and that other dispensing valves, in particular other metered dose dispensing valves, having a valve stem movable between an inner closed or priming position and an outer dispensing position may also be suitable for use. Further examples of dispensing valves, which are actuated or fired upon movement of the elongate outlet member or valve stem outwardly, are described in US 5,772,985, the contents of which are incorporated herein by reference. Other examples of dispensing valves, which are actuated or fired upon movement of an elongate outlet member or valve stem are described in US 2,980,301; US 3,176,887; US 3,176,889;; US 3,591,059; and US 4,506,803.

25

30

Figure 2 shows schematically a vertical cross-section of a preferred embodiment of a dispenser (100) in the form of an inhaler incorporating a preferred embodiment of an

adaptor (30). The adaptor comprises an elongate or cylindrical portion (32), adapted to received the aerosol container (25) equipped with a dispensing valve (generally indicated at 15) comprising a valve stem (12) movable between an inner closed or priming position and an outer dispensing position. The dispensing valve is typically fitted onto the container  
5 by means of a ferrule (5) with the valve stem extending beyond the ferrule. The adaptor also typically comprises a mouthpiece portion (33). A mounting block (34) is provided that supports and retains the container (25), in particular at the position of the ferrule (5), preventing movement of the container. The mounting block (34) is desirably arranged, such that the outlet passage (not shown) of the dispensing valve is aligned along the axis of  
10 the mouthpiece portion (33). The adaptor includes an actuation member (35) provided in the form of a lever, which is mounted on a pivot (36) and has a user end (37), which extends externally from the adaptor, in particular from the elongate or cylindrical portion (32) of the adaptor. The actuating member (35) is biased upwardly towards the container (25) by the action of a conical compression spring (39) mounted between the actuating  
15 member and an internal surface of the adaptor. The outer end of the valve stem (12) rests against the actuating member (35), and because the member is biased upwardly towards the container, the valve stem normally rests in its closed or priming position.

In operation, the patient presses downwards on the user end (37) of the actuating  
20 member (35), whilst simultaneously inhaling through the mouthpiece portion (33). In so doing, the patient causes the actuating member (35) to pivot downwards against the action of the spring (39), thereby allowing the valve stem (12) to move outwardly into its dispensing position.

25 Desirably the dispensing valve is arranged, such that the valve stem is biased outwardly towards its dispensing position by vapor pressure generated by pressurized aerosol formulation contained within the container of the dispenser. Thus, the valve stem moves outwardly into its dispensing position under the influence of the internal vapor pressure. Alternatively, the dispensing valve may include an internal spring bias  
30 positioned at the inner end of the valve stem (not shown) biasing the valve stem towards its dispensing position. In this case, the valve stem moves outwardly into its dispensing position under the influence of the internal spring bias.

After taking a dose of medicament, the patient simply releases the actuating member (35), allowing the spring (39) to return the actuating member to its rest position and thus the valve stem (12) into its closed or priming position. This reset action occurs automatically as soon as the patient releases the actuating member (35), thereby minimizing the time in which internal portions of the dispensing valve, such as a virtual metering chamber, may be open to air or atmospheric moisture. It will be appreciated that in embodiments including a dispensing valve comprising an internal spring bias, the spring of the adaptor will be selected to exert, over the range of spring extensions corresponding to the return of the valve stem from its outer dispensing position to its closed or priming position, a suitably greater compressive force than that exerted by the internal spring.

Figure 3 shows schematically a vertical cross-section of another preferred embodiment of a dispenser (100) in the form of an inhaler incorporating another preferred embodiment of an adaptor (30). Similar to the dispenser illustrated in Figure 2, the adaptor comprises an elongate or cylindrical portion (32), adapted to receive the aerosol container (25) equipped with a dispensing valve (generally indicated at 15) comprising a valve stem (12) movable between an inner closed or priming position and an outer dispensing position. The adaptor also includes a mouthpiece portion (33) as well as a mounting block (34) that supports and retains the container, in particular at the position of the ferrule (5), preventing movement of the container. The adaptor includes an actuating member (35) in the form of a slider. The actuating member (35), which in its cross-section is essentially C-shaped, is located within a gap between the elongate or cylindrical portion (32) and the container (25), with a user end (37) extending outwardly from the open end of the elongate or cylindrical portion (32) and the other end, the internal end, (38) gripping the valve stem. The user end (37) of the actuating member is preferably provided in the form of a concave recess extending over the closed end (26) of the container. A conical compression spring (39) is mounted between the internal end of the actuating member (35) and an internal surface of the adaptor, such that the actuating member is biased upwardly towards the container, so that the valve stem (12) normally rests in its closed or priming position.

In operation, the patient depresses the user end (37) of the actuating member (35), typically by placing their finger(s) in the concave recess of the user end, whilst simultaneously inhaling through the mouthpiece portion (33). In so doing, the patient causes the actuating member (35) to move downwards against the action of the spring (39), thereby pulling the valve stem (12) into its dispensing position.

The arrangement of the actuation mechanism, such that upon a depressive or squeezing force applied by the user the valve stem is pulled into its dispensing position (referred to as "positive pull out action" in the following) is advantageous in that it guarantees the provision of enough force to move the valve stem (12) without the need for an internal spring bias within the dispensing valve. Thus, potential problems associated with the immersion of a spring in a medicinal aerosol formulation can be avoided. Such potential problems may include for example medicament deposition on the large and flexing surface area of the spring, chemical interactions between the drug and the spring, and hindrance to the free flow of aerosol formulation into and out of the chamber. This embodiment and other embodiments (e.g. as described below) including positive pull-out action are particularly desirable for use with dispensing valves having neutral bias or dispensing valves in which the valve stem is biased towards its dispensing position only by vapor pressure generated by the pressurized aerosol formulation contained in the container.

After taking a dose of medicament, the patient simply releases the actuating member (35), allowing the spring (39) to automatically return the actuating member to its rest position and thus the valve stem (12) to its inner closed or priming position.

Figure 4 shows schematically a vertical cross-section of a variation of the preferred embodiment of the dispenser (100) shown in Figure 3. This dispenser is generally similar to the dispenser illustrated in Figure 3, except that the spring (39) is in the form of a torsion spring mounted via a post (40) on the adaptor (30). The user end (37) of the actuating member (35) additionally comprises a movement stop (41), which will act against the top rim of the elongate or cylindrical portion (32) of the adaptor (30). This stop (41) desirably limits and defines the maximum stem movement possible. The other end of the actuating member (35), the internal end (38), is fixedly located on the valve stem (12).

The principles of operation are analogous with those described in conjunction with the dispenser shown in Figure 3.

Figure 5 shows schematically a vertical cross-section of an additional preferred embodiment of a dispenser (100) in the form of an inhaler incorporating an additional preferred embodiment of an adaptor (30). This dispenser is similar to the dispenser illustrated in Figure 3, with an exception that the actuating member (35) has a different shape. In particular, the user end (37) of the actuating member, which is desirably in the form of a finger-button, extends outwardly from a side wall of the of the adaptor, in particular the elongate or cylindrical portion (32) thereof. In addition, an extension (31), also desirably in the form of a finger-bottom, is provided on an external surface of the adaptor in a corresponding position to allow its use in coordination with the user end (37) of the actuating member (35). The patient operates the actuation mechanism by squeezing together the user end (37) of the actuating member (35) and the extension (31). The principles of operation are analogous with those described in conjunction with the dispenser shown in Figure 3.

Figure 6 shows schematically a vertical cross-section of a further preferred embodiment of a dispenser (100) in the form of an inhaler incorporating a further preferred embodiment of an adaptor (30). Similar to the other embodiments illustrated in Figures 2 to 5, the adaptor (30) comprises an elongate or cylindrical portion (32), adapted to receive the aerosol container (25) equipped typically by means of a ferrule (5) with a dispensing valve (generally indicated at 15) comprising a valve stem (12) movable between an inner closed or priming position and an outer dispensing position. In this embodiment, the adaptor is provided with an anchoring block (44), which retains the outer end of the valve stem (12) and prevents movement of the valve stem relative to the adaptor. The anchoring block (44) is desirably arranged, such that the outlet orifice (not shown) of the dispensing valve is aligned along the axis of the mouthpiece portion (33). The elongate or cylindrical portion (32) of adaptor includes an end-cap (27) over the closed end (26) of the container (25). For airflow, orifices (28) may be provided in the end-cap as shown or alternatively in the adaptor near the anchoring block. A conical compression spring (39) is mounted on a guide post (29) between an internal surface of the end-cap (27) and an outer surface of the closed

end (26) of the container, such that the container is biased downwardly towards the valve stem, so that the valve stem (12) normally rests in its inner closed or priming position. The adaptor includes an actuating member (35), which is essentially U-shaped in its cross-section. The actuating member is mounted, such that the base portion (47) of the member is located adjacent to an external surface of the adaptor and the side wall or side fingers (46) extend(s) into the interior of the adaptor. The upper edge (48) of the side wall or side fingers is adjacent to the underside of the container (25), in particular the underside of the shoulder (55) of the ferrule (5). The base portion (47), which serves as a user portion of the actuating member, is desirably in the form of a concave recess or thumb-button. For ease in inserting the side wall or side fingers (46) through appropriate slots (49) in the adaptor body, the side wall or fingers (46) may be flexible. The side wall or side fingers (46) may be provided with projections (not shown) to prevent the removal or detachment of the actuating member (35) from the adaptor body by the patient.

15 In operation, the patient presses the base portion (47) of the actuating member (35) towards the adaptor body, whilst simultaneously inhaling through the mouthpiece portion (33). In so doing, the patient causes the actuating member (35) to push the container (25) upwardly against the action of the spring (39), thereby pulling (in a relative movement) the valve stem (12) into its dispensing position. After taking a dose of medicament, the patient simply releases the base portion (47) of the actuating member (35), allowing the spring (39) to automatically return the container (25) to its rest position and thus the valve stem (12) in its inner closed or priming position.

25 It will be understood that the present disclosure of particular preferred embodiments in accordance with the invention is for the purpose of illustration only and the invention extends to modifications, variations and improvements thereof.

Claims

1. An adaptor for use with a container equipped with a dispensing valve that  
5 comprises a valve stem movable between an inner closed or priming position  
and an outer dispensing position, for dispensing doses of pressurized aerosol  
formulation,  
the adaptor being adapted to receive the container and comprising an actuation  
10 mechanism, said actuation mechanism being arranged such that the user will  
operate the mechanism by applying a depressive or squeezing force and the dose  
will be dispensed upon said depressive or squeezing force and said actuation  
mechanism being arranged such that upon release of the mechanism by the user,  
the valve stem of the dispensing valve will be moved automatically into its  
15 closed or priming position.
2. An adaptor according to claim 1, wherein the actuation mechanism is arranged,  
such that upon said depressive or squeezing force the valve stem will be pulled  
from its closed or priming position into its dispensing position.
- 20 3. An adaptor according to claim 1 or claim 2, wherein the actuation mechanism  
comprises a mounting block and an actuating member; said mounting block  
being adapted to retain the container and to prevent movement of the container  
relative to the adaptor and said actuating member being arranged to be in contact  
with the valve stem and biased towards the container, such that the valve stem  
25 will rest in its closed or priming.
4. A dispenser for dispensing doses of pressurized aerosol formulation to a user,  
said dispenser comprising:  
a container containing a pressurized aerosol formulation and equipped with a  
30 dispensing valve that comprises a valve stem movable between an inner closed  
or priming position and an outer dispensing position, to dispense a dose; and



14

an adaptor adapted to receive the container and comprising an actuation mechanism, said actuation mechanism being arranged such that the user operates the mechanism by applying a depressive or squeezing force and the dose is dispensed upon said depressive or squeezing force and said actuation mechanism being arranged such that upon release of the mechanism by the user, the valve stem of the dispensing valve is moved automatically to its closed or priming position.

- 5
- 10 5. A dispenser according to claim 4, wherein the actuation mechanism is arranged, such that upon said depressive or squeezing force the valve stem is pulled from its closed or priming position into its dispensing position.
- 15 6. A dispenser according to claim 4 or 5, wherein the actuation mechanism comprises a mounting block and an actuating member; said mounting block being adapted to retain the container and to prevent movement of the container relative to the adaptor and said actuating member being in contact with the valve stem and biased towards the container, such that the valve stem rests in its closed or priming.
- 20 7. A dispenser according to claim 6 as dependent on claim 4, wherein said actuating member is arranged, such that upon said depressive or squeezing force the actuating member moves away from the container against the bias allowing the valve stem to move into its dispensing position.
- 25 8. A dispenser according to claim 6 as dependent on claim 5, wherein said actuating member is coupled to the valve stem and wherein said actuating member is arranged, such that upon said depressive or squeezing force the actuating member moves away from the container against the bias and the valve stem is pulled into its dispensing position.
- 30

9. A dispenser according to claim 5, wherein the actuation mechanism comprises an anchoring block, which is adapted to retain the valve stem and to prevent movement of the valve stem relative to the adaptor, and wherein the container is biased towards the valve stem, such that the valve stem rests in its closed or priming position, and wherein said actuation mechanism further comprises an actuating member, said actuating member being arranged, such that upon said depressive or squeezing force, the actuating member moves the container against the bias away from the valve stem, thereby pulling the valve stem into its dispensing position relative to the container.
10. A dispenser according to any one of claims 4 to 9, wherein the dispensing valve is arranged, such that the valve stem is biased towards its dispensing position by vapor pressure generated by the pressurized aerosol formulation.
11. A dispenser according to any one of claims 4, 5, 6, 8 and 9, wherein the dispensing valve is of neutral bias.
12. A dispenser according to claim 7, wherein the dispensing valve comprises an internal spring bias positioned at the inner end of the valve stem biasing the valve stem towards its dispensing position.
13. A dispenser according to any one of claims 4 to 12, wherein the dispensing valve is a metered dose dispensing valve.
14. A dispenser according to claim 13, wherein the dispensing valve further comprises a chamber and an outlet passage, and the valve stem extends into the chamber and is movable relative to the chamber between the closed or priming position and the dispensing position, the valve stem having a configuration including an external surface and the chamber having an internal configuration including an internal surface, such that a movable metered volume of pressurized aerosol formulation is capable of being

16

defined there between and such that during movement between the closed or priming position and the dispensing position the valve stem sequentially:

(i) allows free flow of aerosol formulation into and out of the chamber,  
(ii) defines a closed metered volume for pressurized aerosol formulation  
between the external surface of the valve stem and internal surface of the chamber, and

(iii) moves with the closed metered volume within the chamber without decreasing the volume of the closed metered volume until the metered volume communicates with the outlet passage thereby allowing dispensing of the metered volume of pressurized aerosol formulation,

15. A dispenser according to any one of claims 4 to 14, wherein the pressurized aerosol formulation comprises medicament.

16. A dispenser according to any one of claims 4 to 15, wherein the pressurized aerosol formulation comprises a propellant.

17. A dispenser according to claim 16, wherein the propellant is a hydro-fluoroalkane.

18. A dispenser according to claim 17, wherein the propellant is selected from HFA 134a, HFA 227 and mixtures thereof.

19. A dispenser according to any one of claims 4 to 18, wherein the dispenser is in the form of an inhaler.

Abstract

An adaptor for use with a container equipped with a dispensing valve that comprises a valve stem movable between an inner closed or priming position and an outer  
5 dispensing position, for dispensing doses of pressurized aerosol formulation as well as dispensers comprising such an adaptor and container; said adaptor being adapted to receive the container and comprising an actuation mechanism, said actuation mechanism being arranged such that the user will operate the mechanism by applying a depressive or squeezing force and the dose will be dispensed upon said depressive or  
10 squeezing force and said actuation mechanism being arranged such that upon release of the mechanism by the user, the valve stem of the dispensing valve will be moved automatically into its inner closed or priming position.

7/6

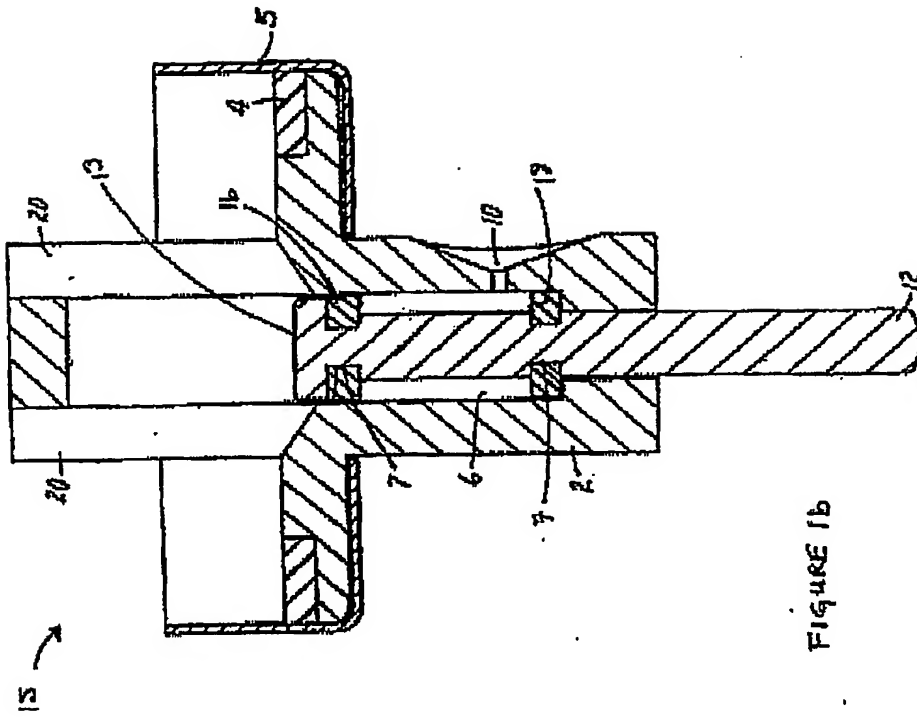


FIGURE 1b


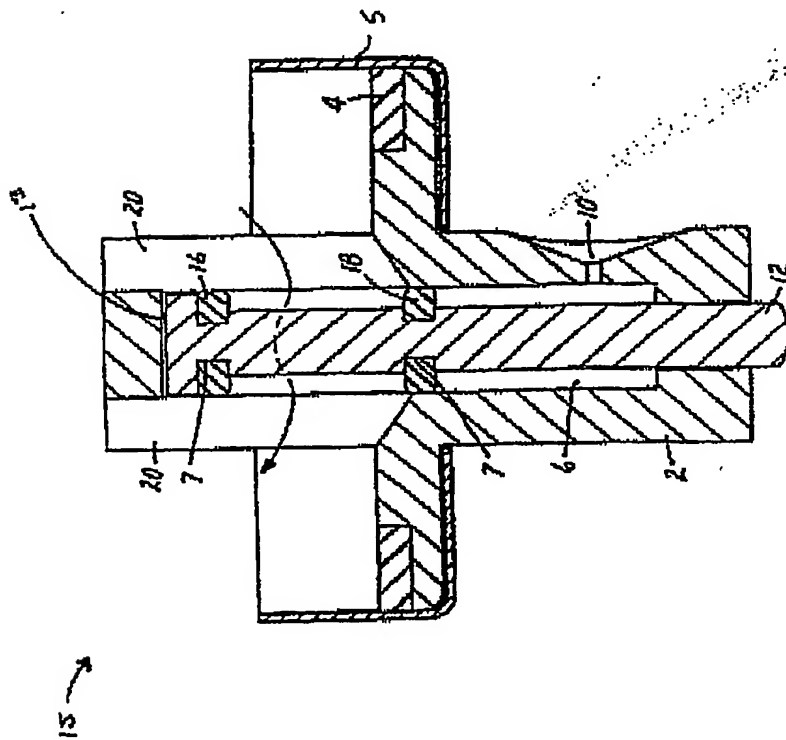


FIGURE 1a


2/6

FIGURE 2:

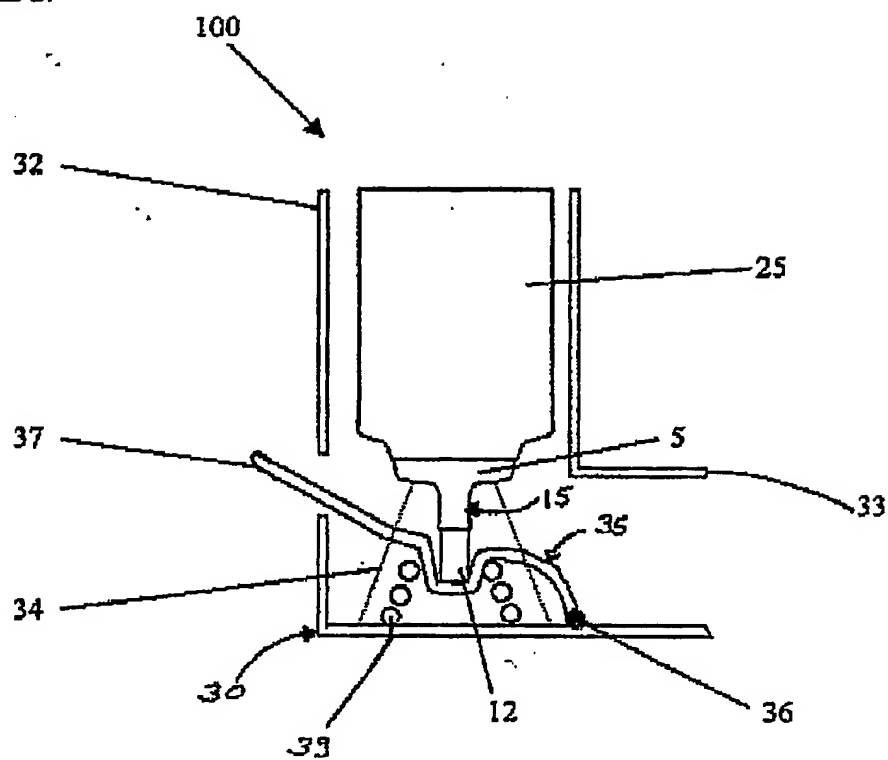


3/6

FIGURE 3:

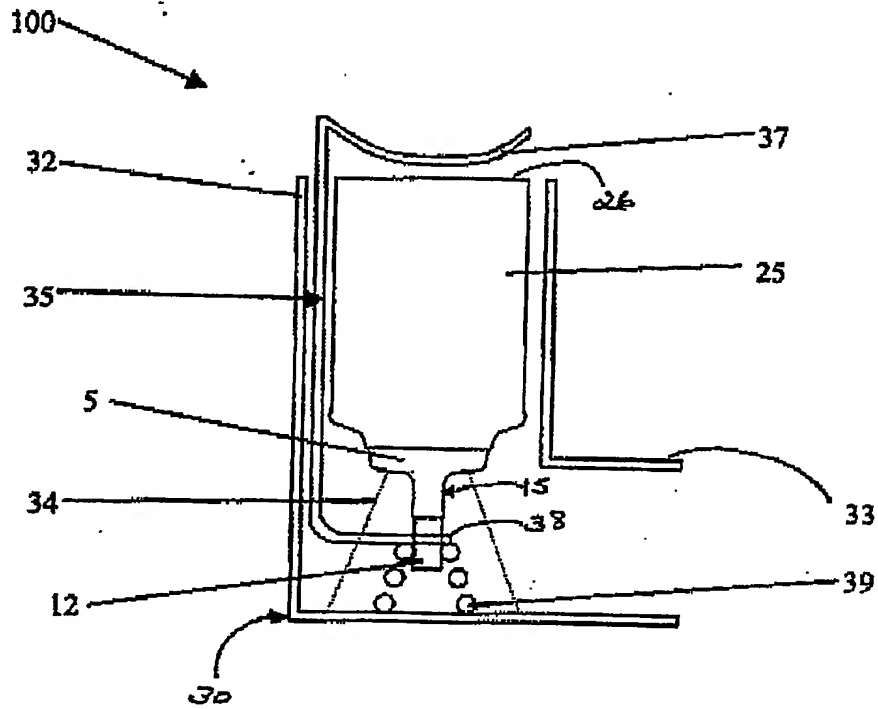

4/6

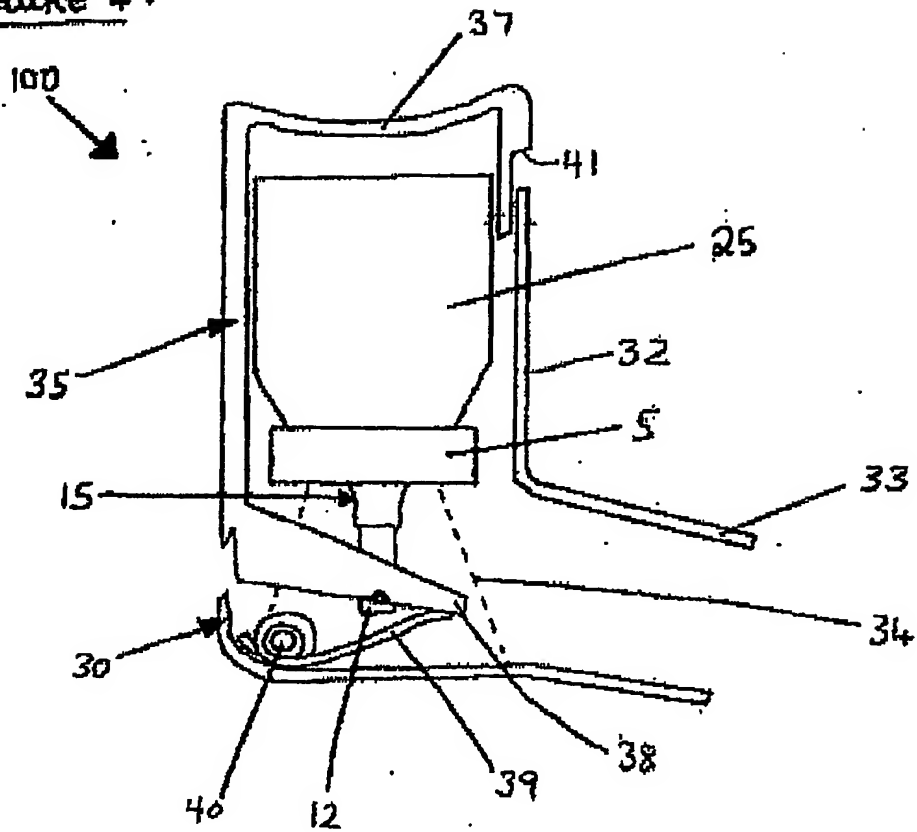FIGURE 4:



5/6

**FIGURE 5:**


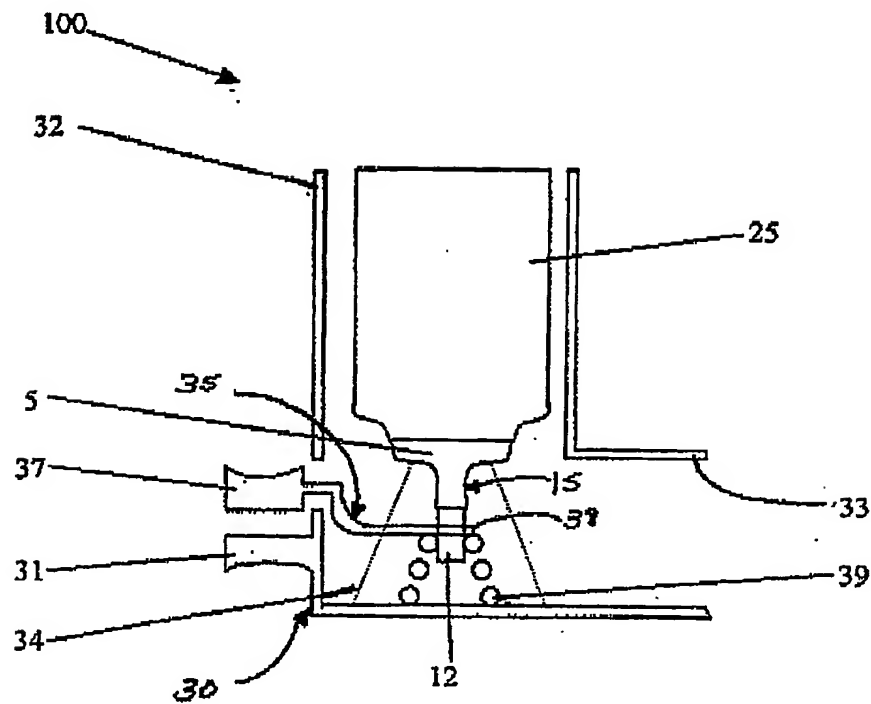


FIGURE 6:

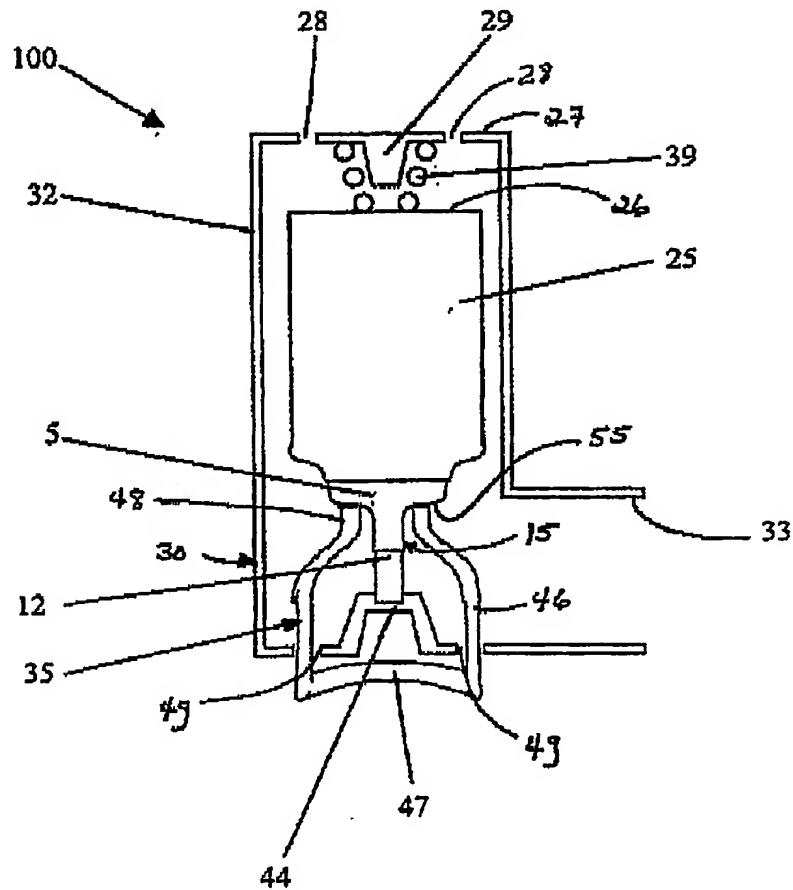

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US03/025502

International filing date: 13 August 2003 (13.08.2003)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0221343.7  
Filing date: 16 September 2002 (16.09.2002)

Date of receipt at the International Bureau: 02 August 2005 (02.08.2005)

Remark: Priority document submitted or transmitted to the International Bureau but not in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse